

LITHIUM ION PHOSPHATE BATTERY CHARGER

The ELBC Series of lithium battery chargers feature an intelligent 3-step charging logic, which can help charge even the deepest of discharged batteries. To maximize battery performance and battery life, the optimized charging technology makes the best possible use of the capacities of the batteries to be charged. With EMC,ROHS,CE compliance, these LiFePO4 battery chargers can be used in a variety of applications ranging from consumer electronics to medical devices.



ELECTRICAL SPECIFICATION	
Input voltage	90-130V/185V-245V
Line frequency	47 – 63Hz
Output voltage	29.2Vdc
Output Current	22A
Max.output power	700W
Charge Control (see charger diagram)	Low current start-up for: CC $1.6A \pm 0.2A$
Step 0 < 10min (Yellow)	when batt volt < 20V
Step 0 > 10min (Red: 4 blinks)	Battery voltage too low: 0A / 0V
Step 1 (LED 2 : RED)	Charge current: $22A \pm 0.3A$
Step 2 (LED 2 : RED)	Charge voltage: $29.2V \pm 0.2V$
Step 3 (LED 2 : Green)	Charge term when current is: < 1.6A
Restart	or max. 1 hr. 26.4V
Protection	Protected against reversed polarity, short circuit and thermal run-off
Input terminal	Customized
Output terminal	Customized

MECHANICAL SPECIFICATIONS	
Dimensions (mm)	L220*W120*H58
Weight	3kg
Cooling method	Air cooling
Case Material	Aluminum alloy
Enclosure protection	/

TEMPERATURE SPECIFICATIONS	
Operating temperature	-10°C to 45°C
Storage Temperature	-40 to 75 °C

FEATURES

- IP54 protection level
- Highly efficient LiFePO4 battery chargers
- 3-step charge control with current detection
- Super high-quality components
- Alligator clip connectors with insulated sleeves
- Robust design with insulation class II


PROTECTION FUNCTION

- Burnout Protection: If temperature of charger exceeds the limitation, the charger will low down the power load. If environment temperature exceeds 65 °C, the charger will stop charging and switch itself to standby mode until the temperature goes down.
- Protection for Reverse Connection of Batteries: The circuit inside the charger shuts down when the batteries are connected reversely.
- NO-load Protection: There is no output when the battery is not connected.
- Short Circuit Protection: The circuit inside the charger will shut down when output is short-circuited.
- Automatic shutdown when fully charged.

BATTERY CHARGER DIMENSION (mm)



CHARGER DIAGRAM

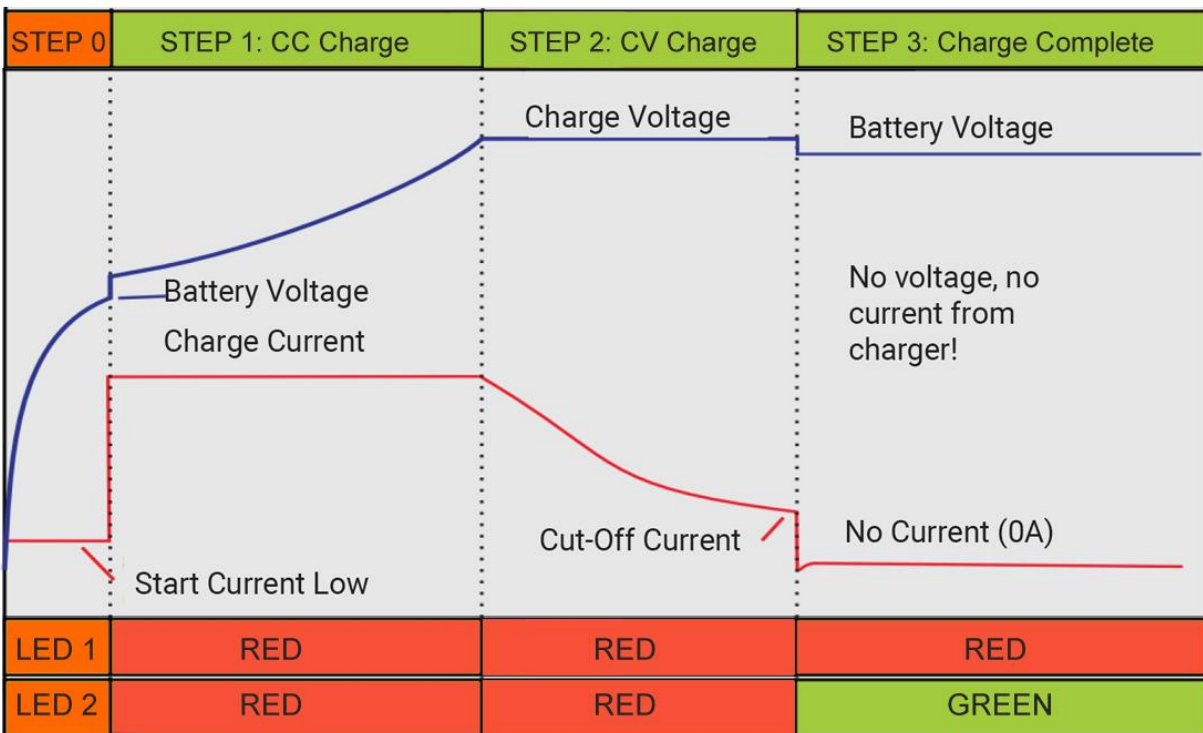

CHARGER INPUT TERMINAL(OPTIONAL)



CHARGER OUTPUT TERMINAL(OPTIONAL)



ELB

ELB ENERGY GROUP (SHENZHEN)LIMITED

Website: <https://www.ecolithiumbattery.com/>

Tel: (86)755-45963729

Mobile: +86 17746563763

Email: Info@ecolithiumbattery.com

Address: Lianhua industrial Zone, Huasheng Road, Dalang street, Longhua District, Shenzhen, China